

DELMARVA 2000™


Delmarva Smoke Absorber

Instructions:

- Open the filter guide, and install the Activated Carbon Filter. Then close the filter guide
- Loosen the knob and adjust the angle. Under normal operating conditions, the filter should be replaced once a month as absorption capacity will decline.

Maintenance:

- Under normal operating conditions, the filter should be replaced once a month as absorption capacity will decline
- The filter may also need replacement when the dust adheres.

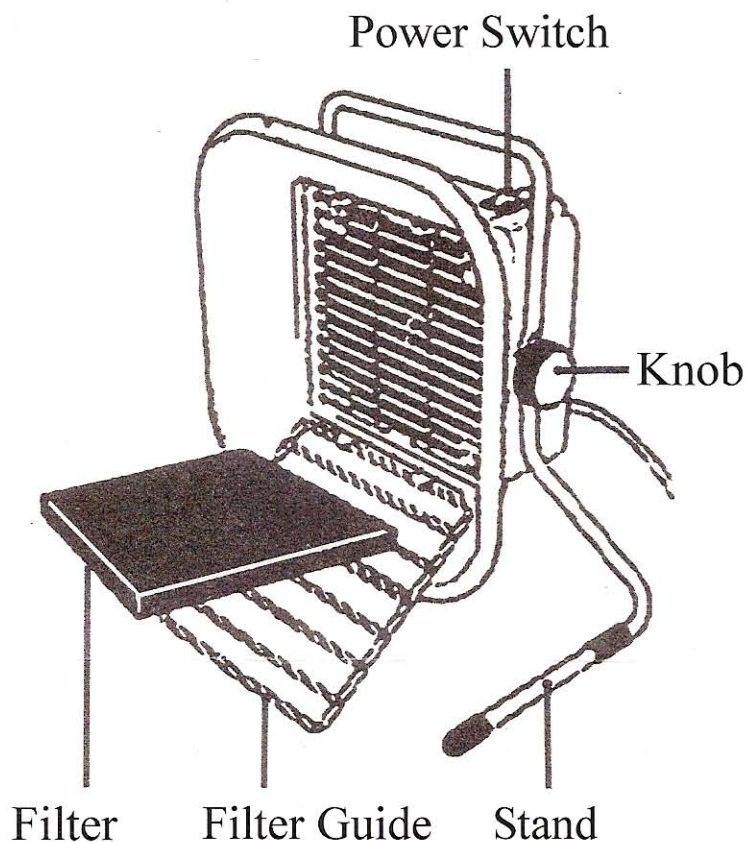

**NEVER ALLOW THE
FILTER TO BECOME WET**

Delmarva 2000
21 Shay Lane * Milton, DE 19968
302-645-2226
www.delmarva2000.com
info@delmarva2000.com